

CRG20

Angular Rate Sensor
Analogue and Digital Gyroscope



CRG20 uses the latest (capacitive) silicon MEMS sensor technology from Silicon Sensing. The gyro is optimised for high-volume production programmes where both performance and cost are key drivers.

This new 'gyro on a chip' is derived from Silicon Sensing's high volume supply to the automotive industry, now being made available to broader markets. To aid initial evaluation, a range of development tools is available, from simple break-out boards to USB-based PC interface boards.

Fully digital closed loop control eliminates any temperature and aging effects associated with analogue electronics, and provides exceptionally stable performance over a wide range of operating conditions.

CRG20 is underpinned by Silicon Sensing's commitment to the technical backup and long-term support necessary to major procurement programmes.

Key features

- Affordable high-volume solution
- Leadless Chip Carrier construction
- Supplied on tape and reel
- Excellent performance over temperature
- Integrated temperature sensor
- Digital (SPI®) and analogue outputs
- Development facilities available
- Several rate range options
- Electronically-readable serial number




CRG20

Angular Rate Sensor Analogue and Digital Gyroscope



For full technical datasheets please go to our website where the documents can be downloaded

All dimensions in millimetres

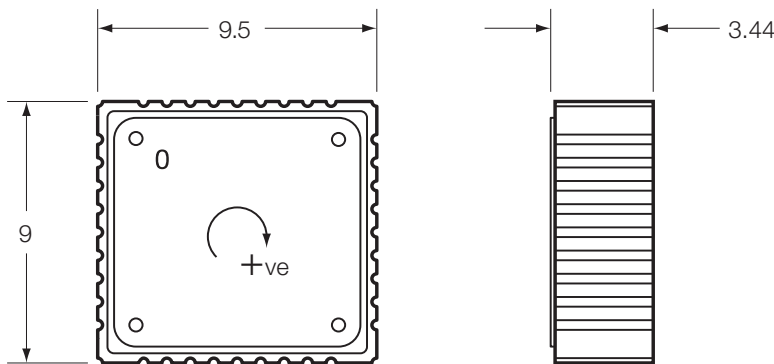

Typical Data	CRG20 All variants	CRG20-01	CRG20-02 CRG20-22
Output format	Digital (SPI®)	Analogue (ratiometric)	
Rate Range	±300°/s	±75°/s	±300°/s
Scale Factor			
Nominal	0.03125°/bit	26.67mV/°/s	6.67mV/°/s
Variation over temperature range	< ±0.7%	±0.9%	
Non-linearity	< ±0.06%	< ±0.06%	
Bias			
Variation over temperature range	< ±0.4°/s	< ±1.0°/s	< ±1.0°/s
Angular Random Walk	0.3°/rt hr	-	
Bias instability	5°/hr	-	
Bandwidth (typical)	< 40Hz (CRG20-1), < 75Hz (CRG20-02), < 90Hz (CRG20-22)		
Quiescent Noise			
1 to 25Hz	0.2°/s rms	0.3°/s rms	
Environment			
Temperature (operating)	-40°C to +105°C		
Linear acceleration	< 100g		
Shock	95g		
Vibration	9g rms (20Hz to 2kHz, random)		
Cross-axis sensitivity	< +2%		
Mass	0.8 gram		
Electrical			
Supply voltage (-20°C to +80°C)	+4.75V to +5.25V		
Supply current	60mA		
Noise and ripple	< 5mV peak to peak		
Start-up time	< 0.5s		
RoHS Compliant	Yes		



Development facilities available:
Evaluation boards
USB interface kit

Silicon Sensing Systems Limited
Cliffatford Road, Southway,
Plymouth, Devon
PL6 6DE United Kingdom

T +44 (0)1752 723330
F +44 (0)1752 723331
E sales@siliconsensing.com
W siliconsensing.com

Silicon Sensing Systems Japan Limited
1-10 Fuso-Cho,
Amagasaki,
Hyogo 6600891, Japan

T +81 (0)6 6489 5868
F +81 (0)6 6489 5919
E sssj@spp.co.jp
W siliconsensing.com

Specification subject to change without notice.

© Copyright 2013
Silicon Sensing Systems Limited
All rights reserved. Printed in England 07/13

CRG20-00-0100-131 Rev 4
DCR No.710005031